



Government College of Engineering
Station Road, Osmanpura, Aurangabad – 431 005

Phone : (0240) 2366101, 110, 111
E-Mail – principalgeca@yahoo.com

Fax : (0240) 2332835
Web – http://www.geca.ac.in

Corrigendum for supply and installation of Plywood arena for Robocon Based on MS Pipe Basement for Robocon

Annexure- I


573

7 FEB 2020

Sr. No.	Specification	Approx Qty.	Remark
01	<p>supply and installation of Plywood arena for Robocon Based on MS Pipe</p> <ol style="list-style-type: none">Size of Arena : - 12.19 meter X 10.97 meter (40 Feet X 36 Feet) <p>Material to be used for Arena :</p> <ol style="list-style-type: none">M.S.Pipe with painted with redoxied (40mm X 25mm X 2mm) to be used for basement /supporting of arena12mm thick ISI /ISO Mark Plywood <p>Details Mejarement</p> <ol style="list-style-type: none">The plywood Fence height : 100mm Guideline width 30mmThe Frame size of each block is 600mm X 600 mm (For total 1440 Sq. Feet)Approx number of block is : - 360The plywood quoted with Asian Apex Ultima paint With full putti felling , Primer cote then paint etc as per our instruction (Total five colour of Paint to be used for colouring of arena)The Design of arena attached Here with	01 No.	<ol style="list-style-type: none">Installed at Our Sight with 0 Tube Level on first flowerWork should be completed within 1 week


Annexure- II

Old Due Date	Revised Due Date for submission of Quotation	Number of Days extended
06.02.2020	10.02.2020 Time 2.00PM	5 Days


Principal
Govt. College of Engg.,
Aurangabad


1. Specifications of Total Arena

Plywood:

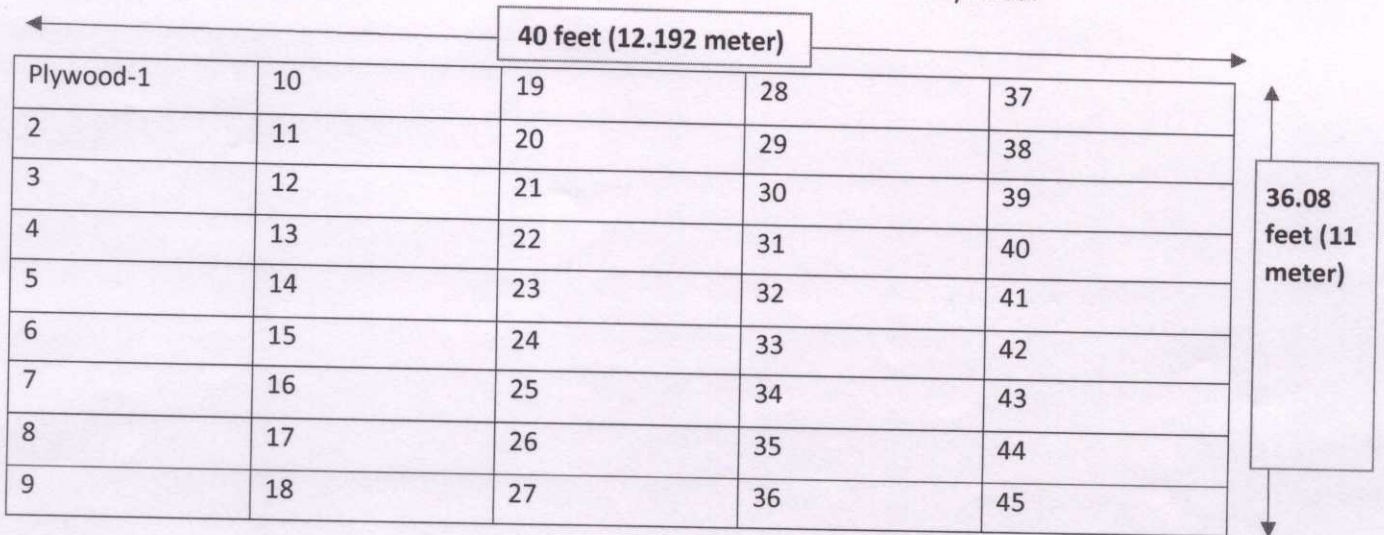

- Total Number of plywood - 45
- Each plywood should of same size to each other as below-

2. Specifications foreachPlywood's support: **Plywood 1-**

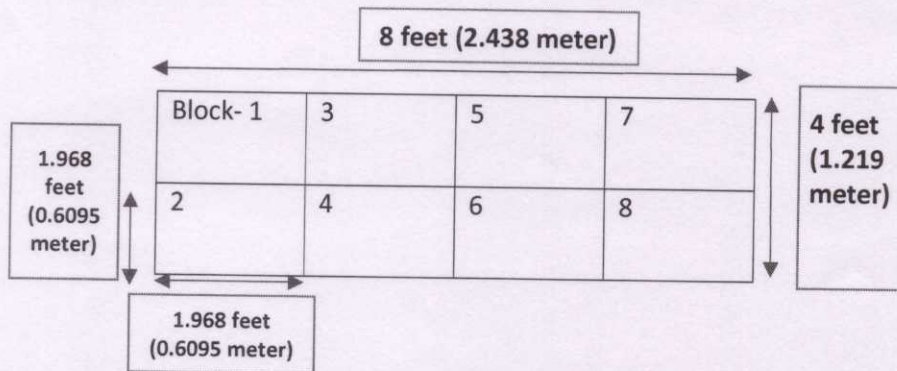

- Total Number of blocks required per plywood for the support - 8
- Total Number of blocks required for the support - 360

ne Field: 3D View

